


F.B.S. 85-37

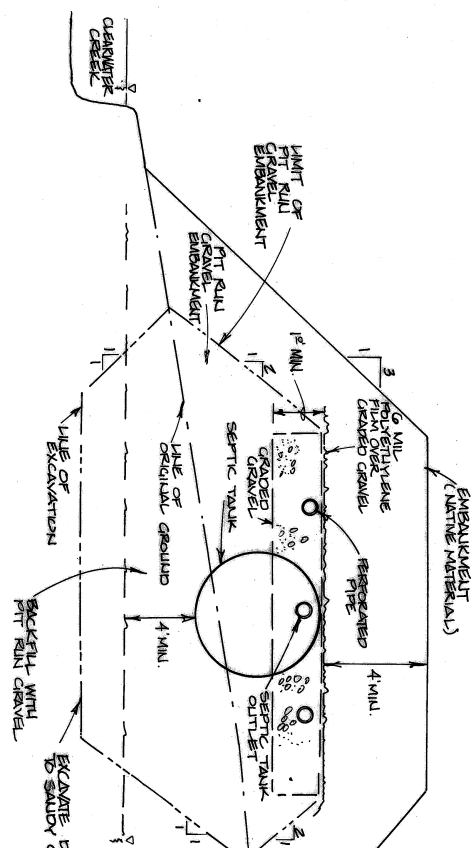

SECTION A-A

1. GRADED GRAVEL TO BE 3/4 MINUS WASHED ROUNDED GRAVEL, WITH 0% PASSING A NO. 4 SIEVE.
2. FIT RUN GRAVEL TO BE SANDY MATERIAL WITH 100% PASSING A 2" SCREEN, 85% PASSING A NO. 10 SIEVE AND LESS THAN 10% PASSING A NO. 200 SIEVE.
3. ALL EMBAKMENTS TO BE COMPACTED TO A MINIMUM OF 85% MAXIMUM DENSITY AT OPTIMUM MOISTURE CONTENT.
4. PERFORATED PIPE TO BE PLACED ON MIN. 6" GRADED GRAVEL.
5. SEPTIC TANK TO BE MIN. 1000 GAL. PLUS 250 GAL. FOR EACH ADDITIONAL BED-ROOM OVER 3.
6. DISTRIBUTION HEADER TO BE 4" PIPE.
7. GRADED GRAVEL TO BE PLACED FLAT.
8. PERFORATED PIPE AND DISTRIBUTION PIPE TO BE LAID FLAT.
9. SEWER FROM HOUSE MAY BE LAID AT MIN SLOPE OF 1/8" FOR STRAIGHT RUNS OVER 50 LONG.
10. MOUND TO BE LOCATE 20' FROM EDGE OF CL
11. SEPTIC TANK AND S
12. BED TO BE LOCATED 10' FROM WATER V
13. MOUND MAY BE 1/4
14. SLOPE BUT NOT IL
15. AGE SWALE OR GUL
16. FINISHED SLOPES
17. TO BE 3 TO 1.
18. SERVICE BED SIZE:
19. 4"x8" LUG OF BEDS
20. 12" PIPE
21. A TO BE MIN 8 FEET
22. MOUND SIDE SLOPES
23. 3 HORIZONTAL TO 1
24. MOUND TO BE LOCATE
25. OF 10' FROM LOCAL
26. OF CLEARWATER CRI

TYPICAL MOUND

SHEET